


REMOVAL AND INSTALLATION

Subwoofer Amplifier — Luggage Compartment

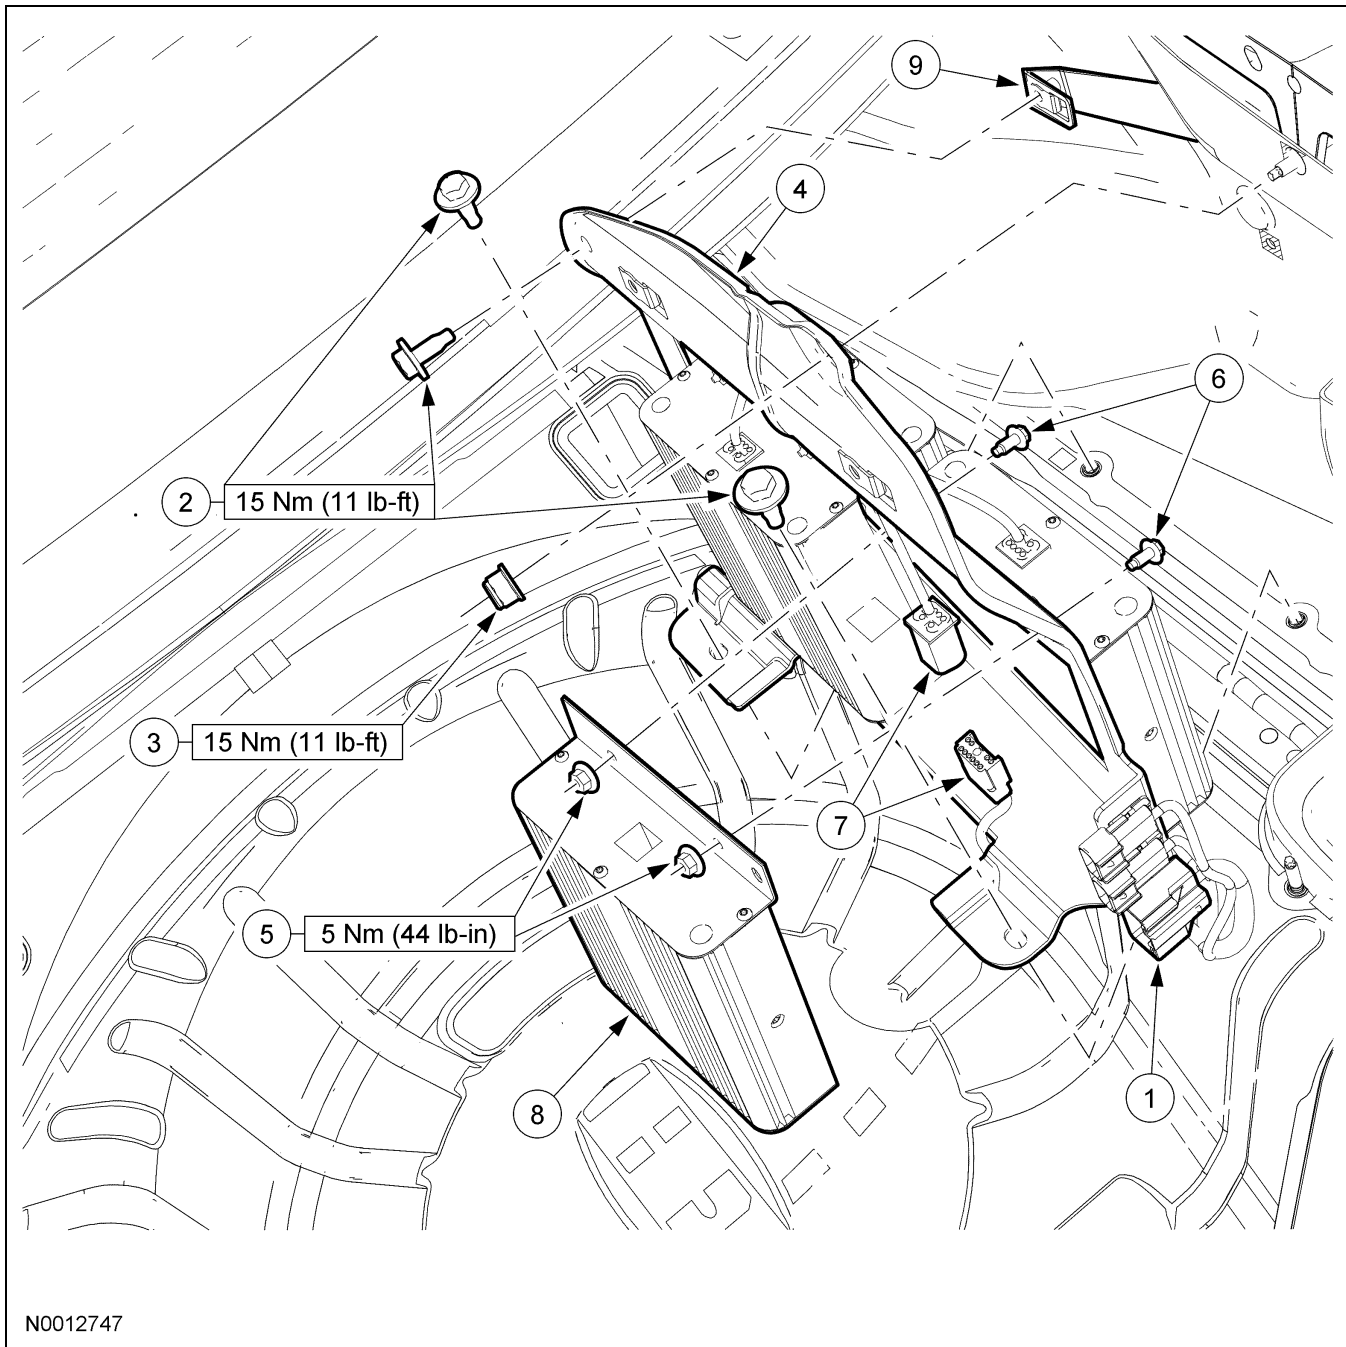

N0012747

REMOVAL AND INSTALLATION (Continued)

Item	Part Number	Description
1	—	Luggage compartment subwoofer amplifier jumper harness electrical connector (part of 14A005)
2	W505433	Luggage compartment subwoofer amplifier rack bolts (3 required)
3	W520212	Luggage compartment subwoofer amplifier rack nut
4	18T806	Luggage compartment subwoofer amplifier rack.
5	N621903	Luggage compartment subwoofer amplifier nuts (4 required per pair of amplifiers)
6	N606663	Luggage compartment subwoofer amplifier bolts (4 required per pair of amplifiers)
7	19B113	Luggage compartment subwoofer amplifier electrical connectors
8	18C088	Luggage compartment subwoofer amplifiers
9	19B187	Attachment bracket

Removal and Installation

1. Remove the speaker enclosure. For additional information, refer to Section 415-03.
2. Disconnect the luggage compartment subwoofer amplifier jumper harness electrical connector.
3. Remove the 3 luggage compartment subwoofer amplifier rack bolts.
 - To install, tighten to 15 Nm (11 lb-ft).
4. Remove the nut and the luggage compartment subwoofer amplifier rack.
 - To install, tighten to 15 Nm (11 lb-ft).
5. Remove the 4 nuts and bolts and the pair of luggage compartment subwoofer amplifiers.
 - Disconnect the electrical connectors.
 - To install, tighten to 5 Nm (44 lb-in).
6. To install, reverse the removal procedure.