


## REMOVAL AND INSTALLATION

### Rear Seat Backrest

#### Coupe Backrest

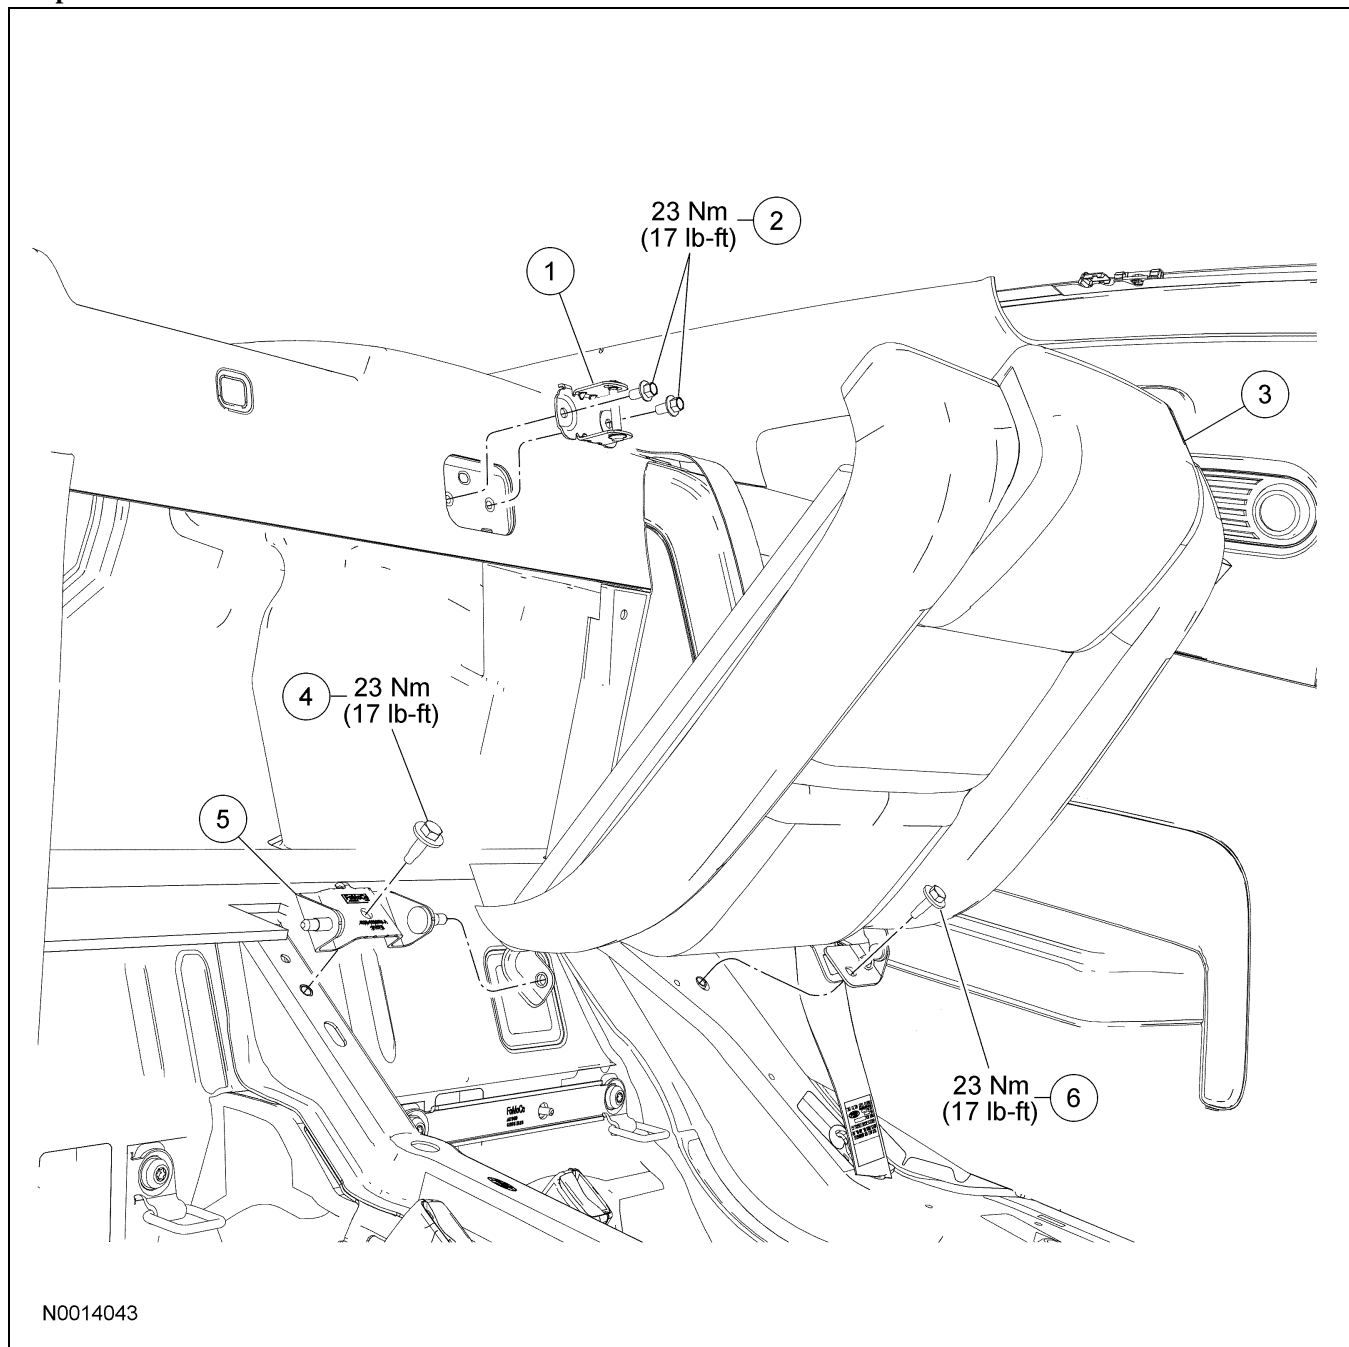

N0014043


Item	Part Number	Description
1	62452	Backrest striker
2	W505260-S424	Backrest striker bolts (2 required)
3	—	Backrest assembly

(Continued)

Item	Part Number	Description
4	W505433-S424	Backrest pivot bracket bolt
5	60615	Backrest pivot bracket
6	W505433-S424	Backrest-to-floor bolt

**REMOVAL AND INSTALLATION (Continued)**

**Convertible Backrest**

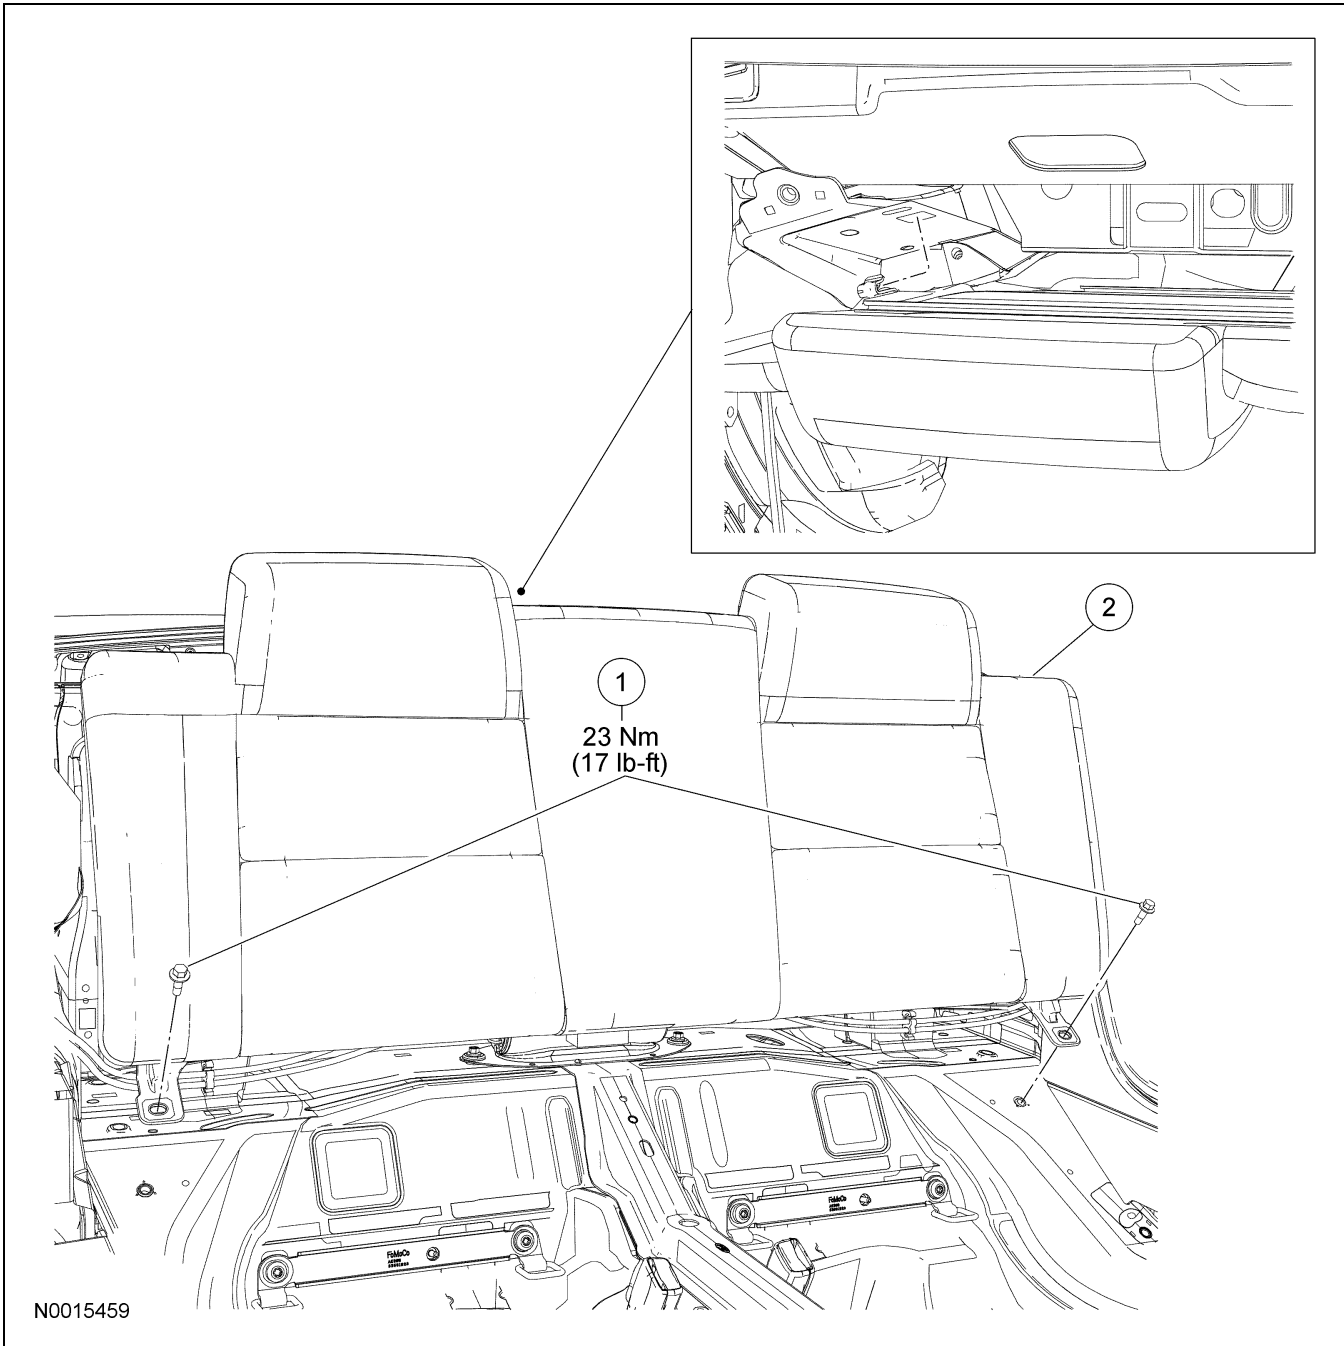

Item	Part Number	Description
1	W505433-S424	Backrest-to-floor bolts (2 required)
2	—	Backrest assembly

**Removal and Installation**

**NOTE:** Coupe LH 50 percent backrest shown, RH similar.

**All vehicles**

1. Remove the rear seat cushion. For additional information, refer to Rear Seat Cushion.

---

**REMOVAL AND INSTALLATION (Continued)****Coupe vehicles**

2. Remove the bolt, pull the strap to pivot the backrest down, slide the backrest out of the backrest pivot bracket and remove the L/H backrest.
  - To install, tighten to 23 Nm (17 lb-ft).

**Vehicles with a convertible top**

3. Remove the backrest bolts at the bottom, slide the backrest up, disengaging the hooks and remove the backrest.
  - To install, tighten to 23 Nm (17 lb-ft).

**All vehicles**

4. To install, reverse the removal procedure.
    - Make sure the safety belts and buckles are accessible to the occupants after installation.
-